


TIMING MODULE

ENCAPSULATED



FULLY SOLID STATE ONE AMPERE LOAD RATING

Series 608G - RETRIGGERABLE ONE SHOT


CMOS DIGITAL CIRCUITRY

- Life Expectancy –unlimited
- **Environment Protected**
- **Tamper Proof**
- No False Operate
- Small Size 2"x 2" x 53/64"
- Lightweight approximately 2.5
- Rugged

Input power is applied continuously. The first closure, momentary, or maintained, of a normally open isolated initiate switch will simultaneously start timing and turn the load ON. When the initiate switch is re-closed during timing, a new delay is started without affecting the load. Upon completion of the preset time delay the load turns OFF and the delay time is reset to To.

Control the timing of valves, SFHP motors, lamps, relays, magnetic line starters, and actuators rated less than 1 ampere (10 amps inrush). CMOS digital circuitry, with solid state output switching. P/C boards and internal components are encapsulated in a flame retardant molded housing, fitted with quick connect wiring terminals. Available in all standard voltages and frequencies. Fixed or adjustable timing from .1 seconds to 24 hours.

TIMING DIAGRAM



AUTO RESET

HOW TO ORDER 608G - (T)(V)(P)

SPECIFICATIONS

- 1. Repeat Accuracy: ± 0.1% or 16 ms. Whichever is greater
- 2. Combined Effect of Temperature and Voltage upon Repeat Accuracy: ±1%
- 3. Reset Time: 150 ms.
- 4. Operating Voltage Tolerance: ± 20%
- 5. Load Current: Steady State 8 ma. Min., 1 Ampere Max.
- 6 Voltage Drop: 1.5V Typical at 1 Ampere
- 7. Leakage Current: 5 ma.
- 8. Dielectric Strength: 1500 VRMS
- 9. Insulation Resistance: 100 Megohms Min.
- 10. Input Transient Protection: 3000V 120V UNITS, 6000V 240V units
- 11. Temperature Ambients: Operating -40°C to +70°C, Storage -55°C to +70°C
- 12. Humidity-Operating: 95% Relative
- 13. Linearity(Option A or D): ±5% Minimum from 10% to 90% of range
- 14. Timing Tolerance: ±9% + Tolerance of Rt Std., ±5% Special (Fixed)

SERIES	(T) = TIME RANGE	(V)=VOLTAGE	(P) = OPTIONS
608G	P = 0.1 - 5 SEC. 1 = 0.1 - 10 SEC. L = 0.2 - 20 SEC. J = 0.3 - 30 SEC. M = 0.6 - 60 SEC. 2 = 1 - 100 SEC. K = 1.2 - 120 SEC. F = 2 - 180 SEC. E = 3 - 300 SEC. 3 = 10 - 1000 SEC. 4 = 0.1 - 10 MIN. G = 0.3 - 30 MIN. H = 0.6 - 60 MIN. 5 = 1 - 100 MIN. V = 3 - 300 MIN. 0 = 10 - 1000 MIN. D = 1 - 24 HRS.	1 = 12VDC 2 = 24VDC 3 = 48VDC 4 = 24VAC 5 = 120VAC 6 = 240VAC	O - CUSTOMER SUPPLIES OWN POTENTIOMETER OR RESISTOR A - POTENTIOMETER SUPPLIED AS LOOSE PART *B - EXTERNALLY INSTALLED RESISTOR *C - FACTORY FIXED INTERNAL D - TRIMMER POTENTIOMETER INSTALLED ON TERMINALS R - INTERNAL POTENTIOMETER WITH THRU SHAFT S - INTERNAL POTENTIOMETER WITH SCREWDRIVER SLOT * For Fixed Time Specify The Value In Seconds, Minutes, Or Hours MADE IN USA

EXAMPLE P/N: 608G-34C/300S This is a RETRIGGERABLE ONE SHOT 1A Rated Solid State Timer with a 300 second DELAY and an INPUT VOLTAGE of 24 VAC. The DELAY is FACTORY FIXED INTERNAL calibration.




American Control Products / Precision Timer a division of Prime Technology 344 Twin Lakes Road North Branford, CT 06471 Telephone: (203) 481-5721 Fax: (203) 481-8937 Email: sales@primetechnology.com

www.primetechnology.com


	TECHNICAL BULLETIN SOLID STATE TIMING MODULE					
	PAGE 1 OF 2	DATE 6-4-01	608G	REV B		

CALIBRATION RESISTANCE VS TIME

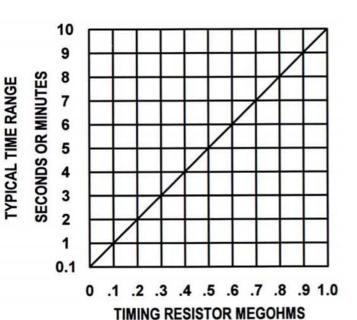


ACCESSORIES - AVAILABLE FROM STOCK

ORDER P/N: PM - 1M 1 MEGOHM ± 20% PM - 100K 100 KOHM ± 20%






TYPICAL WIRING

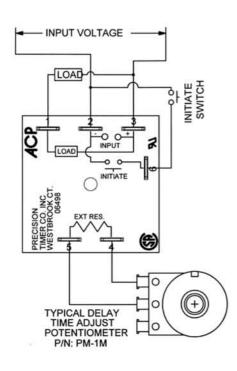

OUTLINE DRAWING

.190 DIA.

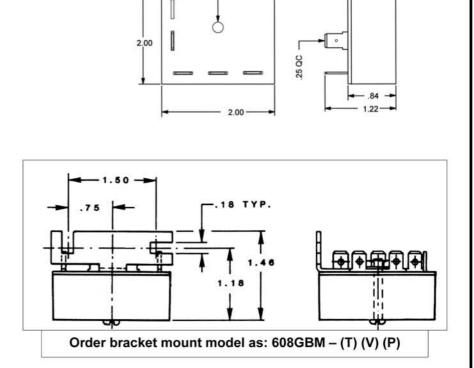

MADE IN USA



American Control Products / Precision Timer a division of Prime Technology 344 Twin Lakes Road North Branford, CT 06471 Telephone: (203) 481-5721 Fax: (203) 481-8937 Email: sales@primetechnology.com

www.primetechnology.com

TECHNICAL BULLETIN
SOLID STATE TIMING MODI

PAGE 2 OF 2 DATE 6-4-01

608G

REV B